


SAFE-SPIRAL MINE

Safe-Spiral MINE is accepted by MSHA (MSHA IC-271) and was designed especially for the underground mining environment that demands flame resistance.

Specifications: **Coil Lengths – standard lengths are 100, 50 or 25 feet**
 Color – dark grey
 Material – HD polyethylene
 Delivery – 2 to 3 weeks from order (made to order)

Spiral Dimensions (Standard Units)

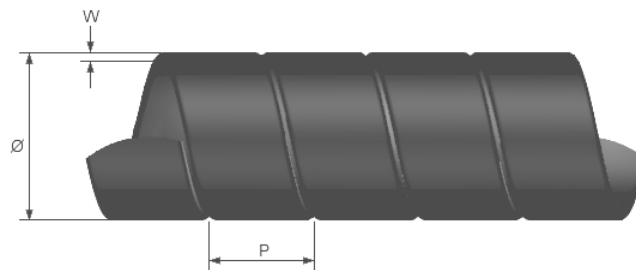


Part Number	Nominal Outer Ø Inches	Nominal Inner Ø Inches	Wall (W) inches	Pitch (P) inches	Recommended Range Hose diameter inches
020M	.75	.63	.05	.8	11/16 to 7/8
025M	1.0	.81	.1	1.0	7/8 to 1 1/8
032M	1.25	1.06	.1	.9	1 1/8 to 1 3/8
040M	1.5	1.36	.11	.94	1 3/8 to 1 5/8
050M	2.0	1.7	.13	1.2	1 5/8 to 2 3/16
063M	2.5	2.2	.15	1.5	2 3/16 to 2 5/8
075M	3.0	2.6	.17	1.75	2 5/8 to 3 1/4
090M	3.5	3.2	.19	1.75	3 1/4 to 3 5/8
110M	4.375	3.9	2.2	2.0	3 5/8 to 4 1/2

SAFE-SPIRAL MINE

Safe-Spiral MINE is accepted by MSHA (MSHA IC-271) and was designed especially for the underground mining environment that demands flame resistance.

Specifications: **Coil Lengths – standard lengths are 100, 50 or 25 feet**
 Color – dark grey
 Material – HD polyethylene
 Delivery – 2 to 3 weeks from order (made to order)

Spiral Dimensions (Metric Units)

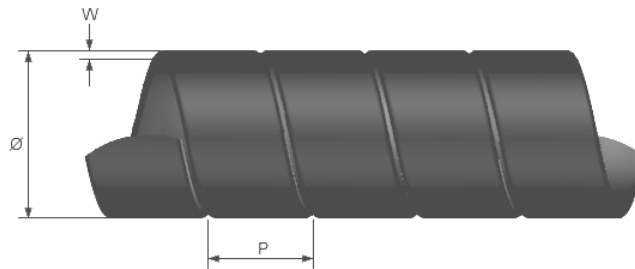

Part Number	Nominal Outer Ø mm	Nominal Inner Ø mm	Wall (W) mm	Pitch (P) mm	Recommended Range Hose diameter mm
020M	20	16.0	2.0	20	16 - 22
025M	25	20.6	2.2	21.5	20 -27
032M	32	27.0	2.5	22	27 - 36
040M	40	34.6	2.7	24	34 - 44
050M	50	43.2	3.4	30	43 - 55
063M	63	55.6	3.7	27	55 - 67
075M	75	66.2	4.4	42	66 - 80
090M	90	80.2	4.9	45	80 - 98
110M	110	99.0	5.5	50	99 - 115